

# RProjects

## Creating a project-oriented workflow in R

Daniela Palleschi

2024-05-06

### Table of contents

<b>Installation requirements</b>	<b>2</b>
<b>Project-oriented workflow</b>	<b>2</b>
Folder structure . . . . .	2
<b>RProjects</b>	<b>3</b>
Creating a new Project . . . . .	3
Opening a Project . . . . .	4
Global RStudio options . . . . .	4
Spot the differences . . . . .	7
Spot the differences: RProject vs. None . . . . .	7
Folder structure . . . . .	7
data/ . . . . .	10
scripts/ . . . . .	10
Load in the data . . . . .	10
<b>here-package</b>	<b>11</b>
The problem with <code>setwd()</code> . . . . .	11
The benefit of <code>here()</code> . . . . .	12
<code>here::here()</code> . . . . .	12

### Learning Objectives

Today we will...

- learn about project-oriented workflows

- create an RProject
- establish a self-contained project environment with [here](#)

## Installation requirements

- required installations/recent versions of:
  - R
    - \* version 4.4.0, “Puppy Cup”
    - \* check current version with `R.version`
    - \* download/update: <https://cran.r-project.org/bin/macosx/>
  - RStudio
    - \* version 2023.12.1.402, “Ocean Storm”
    - \* Help > Check for updates
    - \* new install: <https://posit.co/download/rstudio-desktop/>

## Project-oriented workflow

1. Folder structure:
  - keeping everything related to a project in one place
  - i.e., contained in a single folder, with subfolders as needed
2. Project-relative working directory
  - the project folder should act as your working directory
  - all file paths should be relative to this folder

## Folder structure

- a core computer literacy skill
  - keep your Desktop as empty as possible
  - have a sensible folder structure
  - avoid mixing subfolders and files
    - \* i.e., if a folder contains subfolders, ideally it should not contain files

## RProjects

- in data analysis, using an IDE is beneficial
  - e.g., RStudio
- most IDEs have their own implementation of a Project
- in RStudio, this is the RProject
  - creates a `.Rproj` file in a project folder
  - stores project settings
- you can have several RProjects open simultaneously
  - and run several scripts across projects simultaneously
- most importantly, RProjects (can) centralise a specific project's workflow and file path
- to read more about R Projects, check out [Section 6.2: Projects](#) from Wickham et al. (2023) (or [Ch. 8 - Workflow: Projects \(wickham\\_r\\_2016?\)](#))

## Creating a new Project

- when?
  - whenever you're starting a new course or project which will use R
- why?
  - to keep all the relevant materials in one place
- where?
  - somewhere that makes sense, e.g., a folder called `SoSe2024` or `Mastersarbeit`
- how?
  - `File > New Project > New Directory > New Project > [Directory name]`  
> Create Project

### New RProject

Create a new RProject for this course

- `File > New Project > New Directory > New Project > [Directory name]`  
> Create Project

- make sure you choose a sensible location

## Opening a Project

- to open a project, locate its `.Rproj` file and double-click
- or if you're already in RStudio, you can use the Project (None) drop-down (top right)

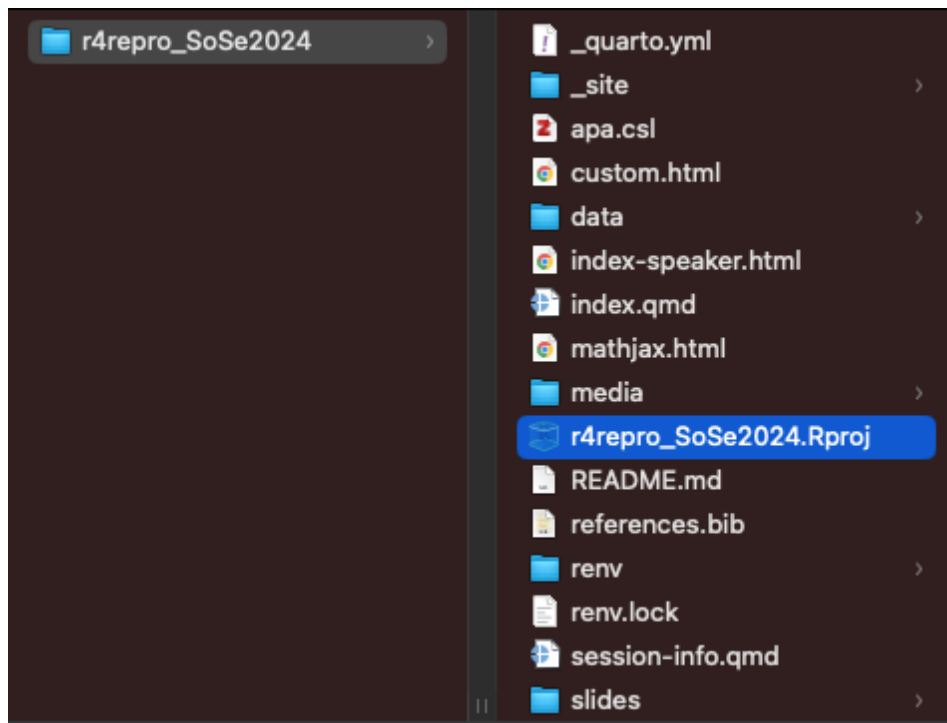


Figure 1: Double-click `.Rproj`

## Global RStudio options

- Tools > Global Options
  - **Workspace:** Restore `.RData` into workspace at startup: NO
  - Save workspace to `.RData` on exit: Never
- this will ensure that you are always starting with a clean slate
  - and that your code is not dependent on some package or object you created in another session

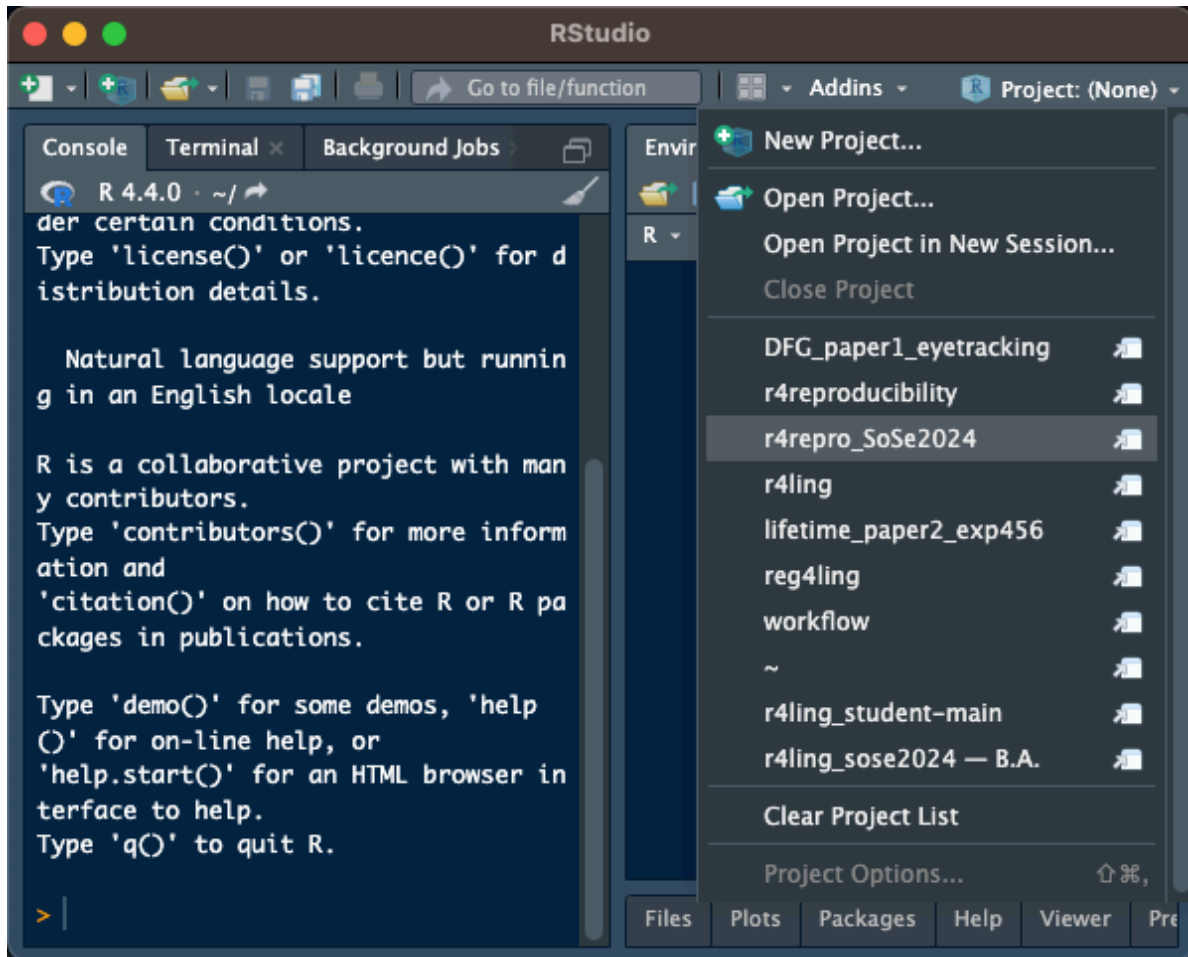


Figure 2: Open from RStudio

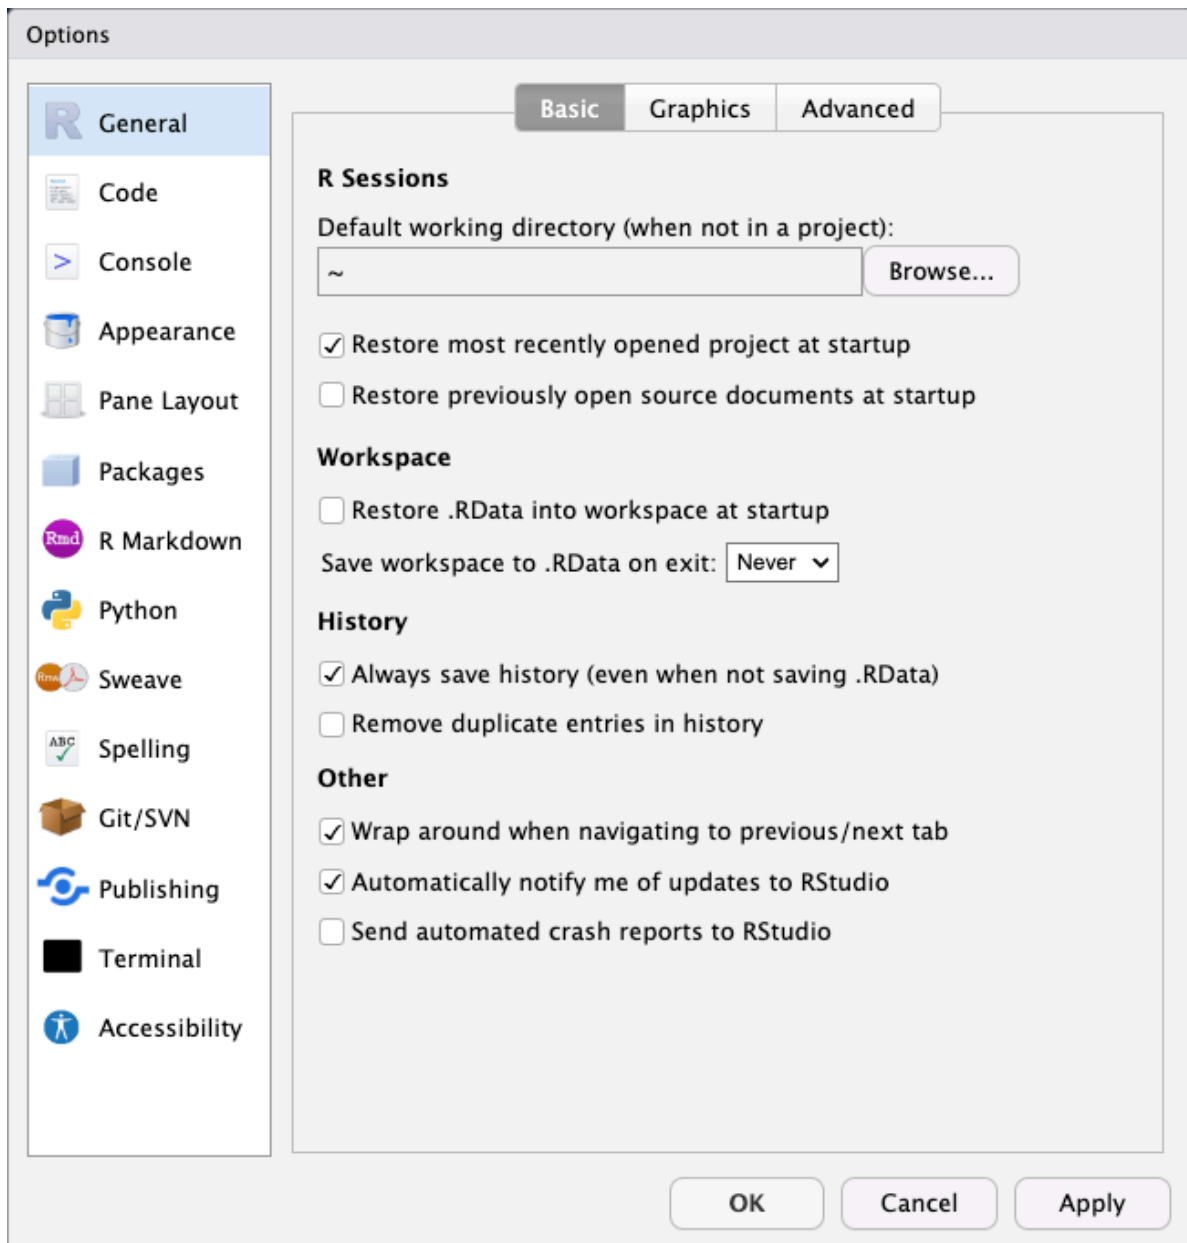



Figure 3: RStudio settings for reproducibility

- this is also how RMarkdown and Quarto scripts run
  - they start with an empty environment and run the script linearly

 Global settings

Change your Global Options so that

- **Workspace:** Restore .RData into workspace at startup: NO
- Save workspace to .RData on exit: Never

### Spot the differences

### Spot the differences: RProject vs. None

Figure 1: RStudio Session A


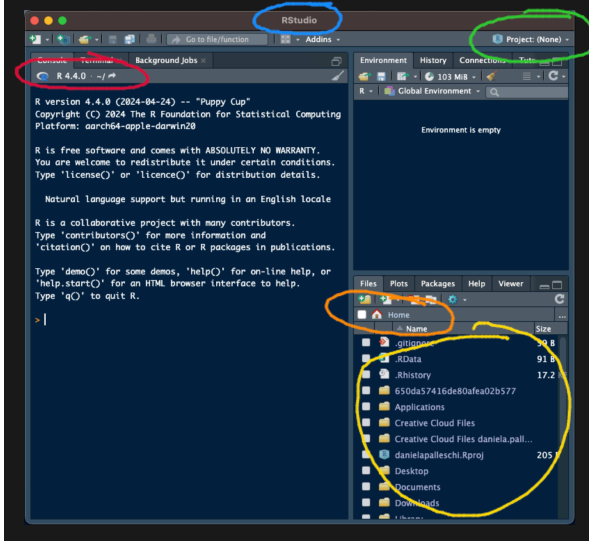


Figure 2: RStudio Session B

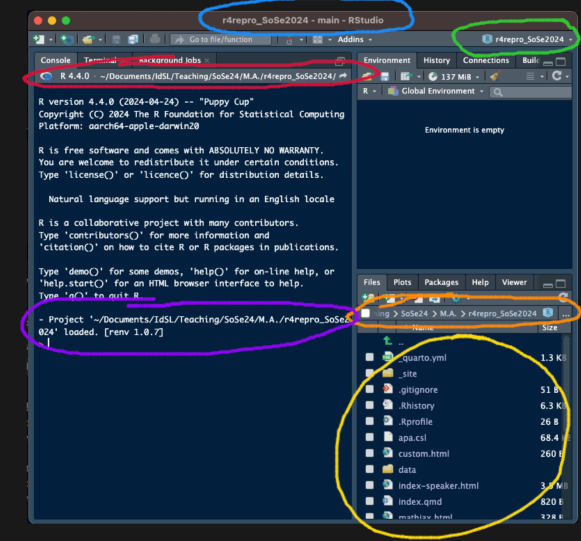

### Folder structure

- some folders you'll typically want to have:
  - data: containing your dataset(s)
  - scripts (or analyses, etc.): containing any analysis scripts
  - manuscript: containing any write-ups of your results

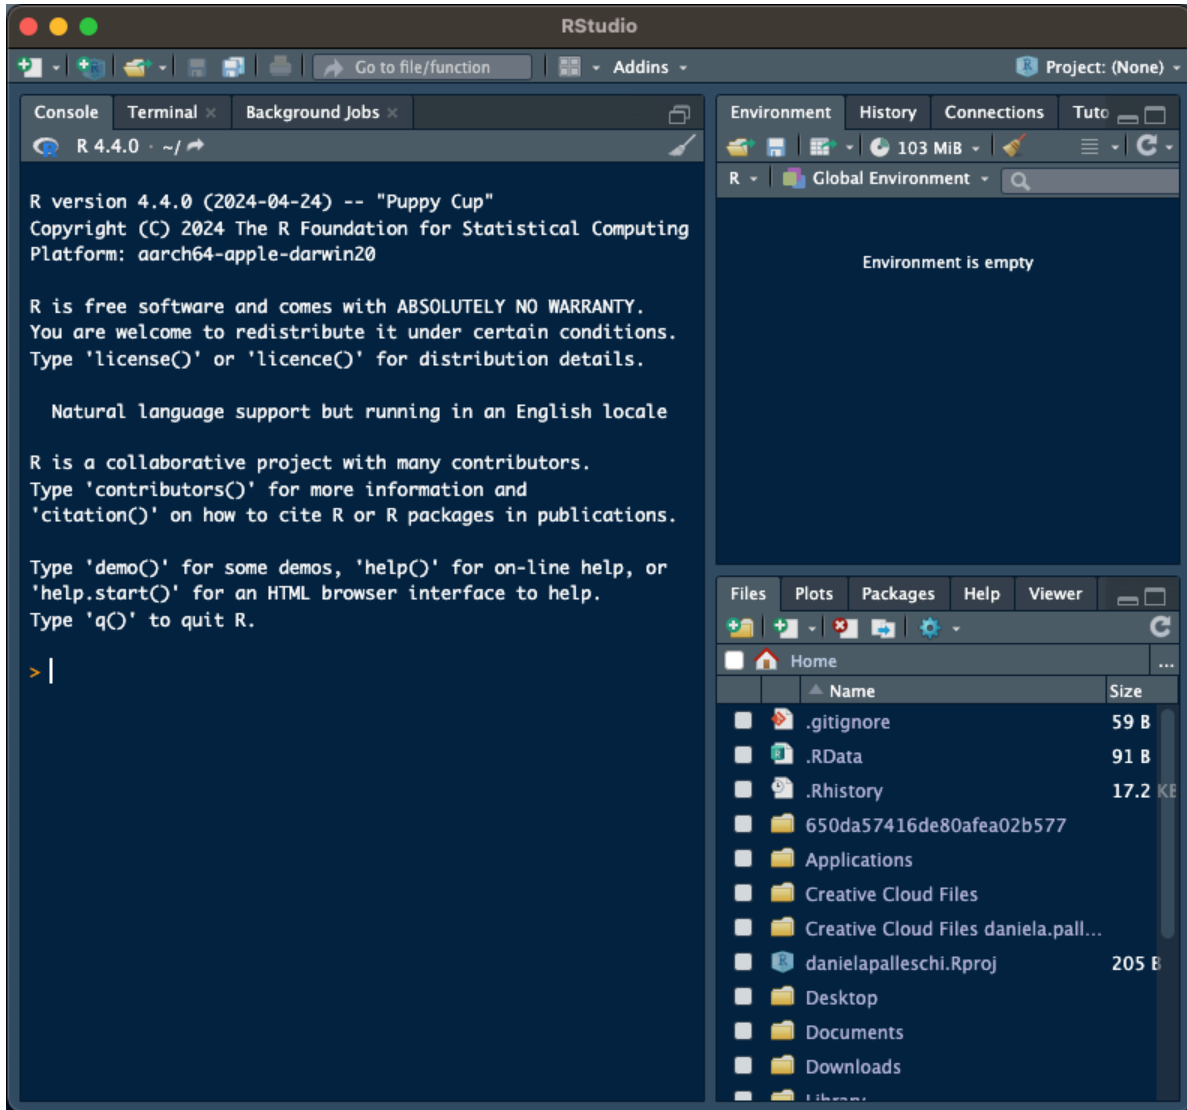


Figure 4: RStudio Session A



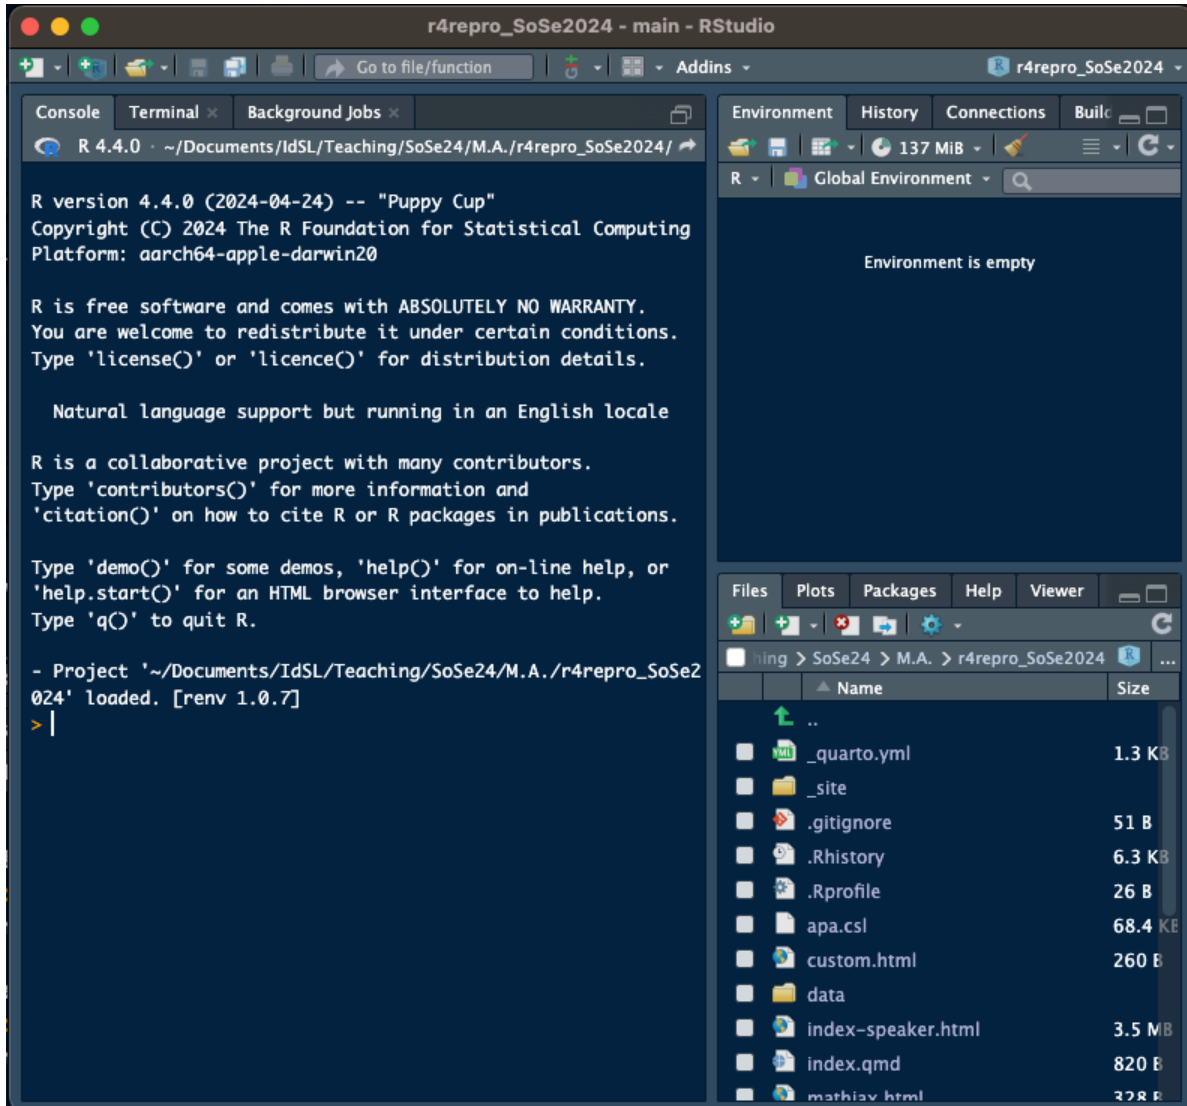


Figure 5: RStudio Session B

- **materials**: containing relevant experiment materials (e.g., stimuli)
- let's just create the first 2 (**data** and **scripts**)

#### **data/**

- do you have “raw”, i.e., pre-processed data?
  - if so, you might want to create a **raw** sub-folder
  - and any other relevant sub-folders (e.g., **processed** or **tidy**)
- download the dataset on this week's Moodle section
  - *or*, move a dataset of your own to this folder

#### **scripts/**

- try to create a single script for each “product”
  - e.g., anonymised data, ‘cleaned’ data, data exploration, visualisation, analyses, etc.
- you can create sub-folders as the project develops and move scripts around
  - for now, let's create a new script to take a look at our data

#### New script

Create a new Quarto script:

1. **File > New File > Quarto Document**
2. Add a title
3. Uncheck the **Use Visual Editor** box
4. Click **Create**
5. Save it in your **scripts/** folder: **File > Save as...**

#### **Load in the data**

- load in the data however you normally would
  - e.g., `readr::read_csv()`

## here-package

- here package (Müller, 2020) enables file referencing
  - avoids the use of `setwd()`



Figure 6: Illustration by [Allison Horst](#)

### The problem with `setwd()`

If the first line of your R script is

```
setwd("C:\Users\jenny\path\that\only\I\have")
```

I will come into your office and SET YOUR COMPUTER ON FIRE .

— Jenny Bryan

- `setwd()` depends on your entire machine's folder structure
- `setwd()` breaks when you
  - send your project folder to a collaborator
  - make your analyses open
  - change the location of your project folder
- using slashes is also dependent on your operating system

### The benefit of `here()`

- uses the top-level directory of your project as the working directory
- can separate folder names with a comma

#### here

Load the dataset using `here`

1. Install `here` (e.g., `install.packages("here")`)
2. Load `here` at the beginning of your package
  - or use `here::` before calling a function
3. Use the `here()` function to load in your data
4. Inspect the dataset however you usually would (e.g., `summary()`, `names()`, etc.)
5. Save your script

### `here::here()`

- install package

---

#### Listing 1 In the Console

---

```
install.packages("here")
```

---

- load package and call the `here` function

```
# load package
library(here)

# read in data
df_data <- read.csv(here("data", "data_lifetime_pilot.csv"))
```

- or directly call the `here` function without loading the package

```
# read in data without loading here
df_data <- read.csv(here::here("data", "data_lifetime_pilot.csv"))
```

### Reproduce your analysis

1. Make sure you save your script, then close your Rproject.
2. Re-open the project. Can you re-run the script?

## Learning objectives

Today we learned...

- learn about project-oriented workflows
- create an RProject
- establish a self-contained project environment with `here`

## References

- Bryan, J., Hester, J., Pileggi, S., & Aja, D. E. (n.d.). *What They Forgot to Teach You About R*. <https://rstats.wtf/>.
- Bryan, J., & TAs, T. S. 545. (n.d.). *Chapter 2 R basics and workflows | STAT 545*.
- Müller, K. (2020). *Here: A simpler way to find your files*. <https://CRAN.R-project.org/package=here>
- Using RStudio Projects. (2024). In *Posit Support*. <https://support.posit.co/hc/en-us/articles/200526207-Using-RStudio-Projects>.
- Wickham, H., Çetinkaya-Rundel, M., & Golemund, G. (2023). *R for Data Science* (2nd ed.).